


PBCU-DC: PUSH BUTTON CONTROL UNIT FOR BULLDOG BUTTONS

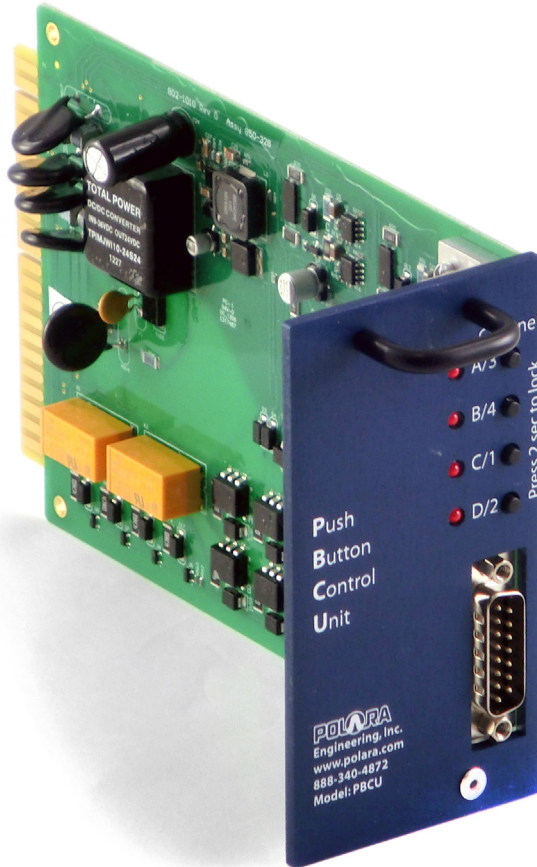

The Polara Push Button Control Unit (PBCU-DC) is an interface device for Polara Bulldog pedestrian push buttons, designed especially for the BDL3 which can operate in either momentary or latching LED mode. It also powers down all BDL3 buttons when an intersection is in flash so buttons do not provide any indication when pushed. It is designed as a double width plug-in module that supports 4 PED PHASES and up to 4 buttons per phase. It is typically installed in a standard detector input in a NEMA style cabinet. It is intended only for use with Polara Bulldog buttons. The PBCU-DC is fully compliant with MUTCD 2009 Section 4E.08 for latching Push Buttons. See Installation and Operation Manual for detailed list of features, functions and specifications.

SPECIFICATIONS:

Mechanical

Height: 4.50 inches

Width: 2.34 inches

Length: 7.00 inches excluding pull handle

Electrical

DC Power Input: 24 volts nominal (10 to 28)

AC Walk / Don't Walk Inputs: 80 to 150 volts AC

Logic Inputs: Low (true) less than 8 volts DC; High (false) greater than 12 volts DC

Voltage supplied to field buttons: 18 volts DC regulated

Environmental

Specified operation from -34°C to 74°C

Operation from 0% RH to 95% RH non-condensing

Operation to 10,000 ft. altitude

Hardware Kit

PBCUHK Standard 6 Foot Cables included with each PBCUHK.

PBCUHK-15 15 Foot Cables can be ordered instead of 6 Foot Cables at an extra charge.

Distributed by:

www.tacel.ca
info@tacel.ca



Head Office

179 Bartley Dr. Unit B Toronto, ON M4A 1E6
Phone 416 750-4646
Toll Free 877 750-4646
Fax 416 750-4649